


# ASPHALT STREET RESTORATION FOR BOX CULVERT

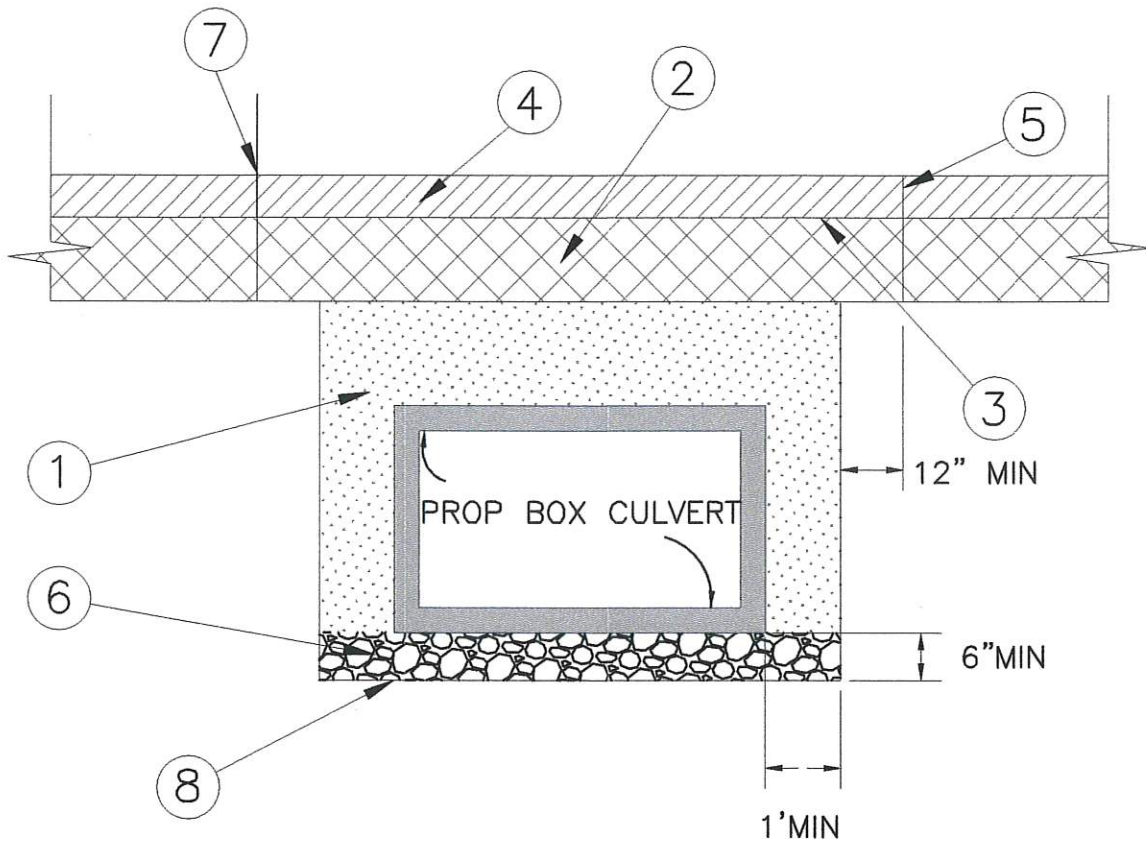

- ① - ODOT ITEM 304 VIRGIN LIMESTONE COMPACTED TO 100% STANDARD PROCTOR TEST OR NO. 57 LIMESTONE ALTERNATE AS APPROVED BY THE CITY OF STOW ENGINEER

② - 9.5" ITEM 301 ASPHALT CONCRETE BASE, COMPACTED IN TWO LIFTS MINIMUM, DEPTH TO MATCH EXISTING ASPHALT, IF GREATER.

③ - ITEM 407 TACK COAT AT 0.075 GAL/SY

④ - 2" ITEM 441, ASPHALT CONCRETE SURFACE COURSE TYPE 1(449), PG 64-22 LIMESTONE AGGREGATE, VIRGIN MATERIAL ONLY
- ⑤ - JOINT SEALER, AC-20 OR EQUAL PER ODOT 705.04

⑥ - 6" MIN. NO. 57 LIMESTONE BEDDING OR AS APPROVED DESIGN

⑦ - ALL JOINTS MUST BE FULL DEPTH SAW CUT PER O.D.O.T. 252 WITH DUST CONTROL BY WATER APPLICATION

⑧ - COMPACTED SUBBASE APPROVED

CITY OF STOW, OHIO ENGINEERING DEPT.	
CONSTRUCTION STANDARD	
DRAWN BY: JHC DATE REVISED: 7/20/23	
CITY ENGINEER: <i>James D. McCleary</i>	
DATE: <u>7/28/23</u>	
DWG FILE: SDR-5	N.T.S.